

COUNTER TOP ELECTRIC PIZZA & PRETZEL OVENS



Model P22S

Model – P22S

Model – P22-BL

Standard Features

- 3600 Watts in 208V or 220-240V
- 300°-650°F Temperature range (149°-343°C)
- Electric 15-Minute timer with continuous ring alarm and manual shut-off
- Single cook/baking chambers
- Two Cordierite hearth decks per oven with 3 1/4" (83mm) deck heights
- All stainless steel exterior
- Unitized, welded, aluminized steel interior fully insulated
- 6' (1830mm) Cord & plug on single phase units
- Limited 1-Year parts and labor warranty
- 4" (120mm) Adjustable legs

Specifications

The P22S and P22-BL with brick lined option electric counter top ovens feature a single bake chamber, with two Cordierite hearth decks and 3 1/4" (83mm) deck height.

Designed for pizza, pretzels, flat breads and bakery products baked directly on the hearth deck, screens, pans or baking sheets.

The brick lined option adds top heat intensity, speeds recovery and increases production. The brick lined option may be easily installed in the standard P22S either in the field or factory. Cordierite hearth decks are easily removable for cleaning or replacement.

Controls feature a 15 minute electric timer with continuous ring alarm and manual shut-off, and a 300° - 650° F (149° - 343° C) thermostat.

The exterior front, sides and top and doors are fabricated of heavy gauge type stainless steel with a #4 finish. Door handle is constructed of tubular stainless steel. Exterior measures 26" (660mm) wide by 28" (711mm) deep by 17" (432mm) tall overall.

The interiors are constructed of high heat aluminized steel, welded to form a single unitized body. The entire oven is insulated with 1 1/2" (38mm) thick industrial grade insulation. Each Cordierite hearth deck measures 20 3/4" (527mm) by 20 3/4" (527mm).





Incoloy, tubular heating elements provide top and bottom heat with up to 3600 watts in 208v or 220-240v, single or three phase. 6' Cord and plug provided on single-phase models. International voltages available. 1-Year limited parts and labor warranty included.

Options & Accessories

- Digital electronic timer with LED display
- Stainless steel stand with or without casters
- Brick lined conversion kit (standard with P22-BL)
- Glass windows for doors
- International voltages
- Deck scraper brush
- Stacking kit



COUNTER TOP ELECTRIC PIZZA & BAKE OVENS

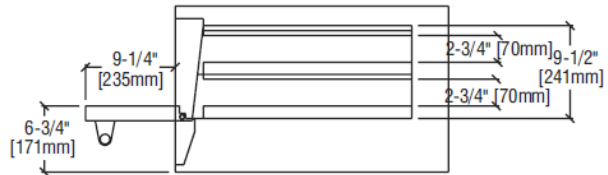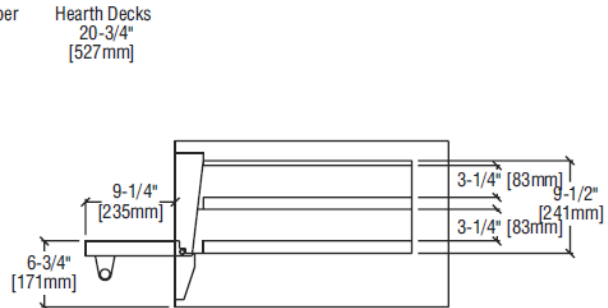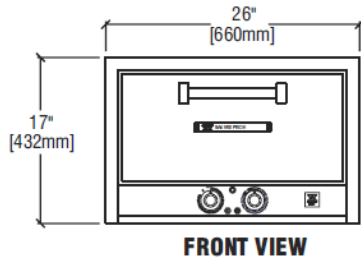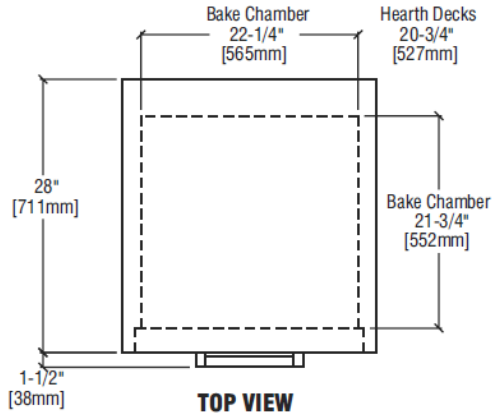

ALL DIMENSIONS NOMINAL

Model	Shipping Wt.		Carbon Dimensions				Crate Size	
	Lbs.	Kilos	Width Inches	mm	Depth Inches	mm	Height Inches	mm
P22S	160	73	32	813	30 1/2	775	22 1/2	572
P22S/BL	165	75	32	813	30 1/2	775	22 1/2	572

Under 500 lbs = Shipping Class # 70


Model	WATTS	VOLTAGE	PHASE	AMPS	NEMA Plug #		
					USA	Canada	UK
P22S/BL	3600	208	1	17.3	6-20P	6-30P	CEE7-VIII
			3	12.1	—	—	—
P22S/BL	3600	220-240	1	17.1	6-20P	6-20P	CEE7-VII
			3	12.0	—	—	—

Each oven requires a separate electrical connection — 3 Phase and Export Voltages No Line Cord

Model	Deck Size		# Decks	# Cook Chambers	Overall Dimensions					
	Inches	mm			Width Inches	mm	Depth* Inches	mm	Height* Inches	mm
P22S/BL	20 3/4	20 3/4	2	1	26	660	28	711	17	432

	Non-Combustible Construction*		Combustible Construction**	
	Inches	mm	Inches	mm
Left Side	3	76	3	76
Right Side	3	76	3	76
Rear	3	76	3	76

* In European Community Countries and North America. In NON-COMBUSTIBLE locations only.
** In European Community Countries only in COMBUSTIBLE locations. NOT for North America.



Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification.