

## The Ultimate Outdoor Char-Broiler



CBBQ-60-CP with Optional 30" in-line griddle & wind guard

### Specifications

The Ultimate Outdoor Char Broiler are designed for broiling, grilling, steaming, roasting and holding all in a single piece of equipment.

CBBQ models feature 30" wide (762mm) or 60" wide (1524mm) by 24" deep (610mm) broiling areas. All models come standard with an all stainless steel exterior, an 8" deep (203mm) stainless steel work deck, stainless steel valve panel, stainless steel water/grease pans, heavy-duty nickel-chrome plated removable top grates.

Built-in models come with front removable water/grease pans and roll-top hood(s).

Base models come with stainless steel stand, legs, casters (two with locks).

Packages also include mobile tank caddy and 40 lb L.P. tank(s).

Complete Packages also include the customer's choice of roll-top hood(s) or wind & splash guard(s).

20,000 BTUH steel burners are located every 7" (178mm) for maximum top heat intensity and greater production with independently controlled, adjustable burner valves for precision control and energy efficiency.

Standard crossover pilot tube system provides additional safety, energy savings and ease of operation.

Exteriors are fabricated of heavy gauge type stainless steel. Interiors are fabricated high heat resistant aluminized steel. Overall exterior dimensions are 33 1/2" deep (826mm) and either 32" (813mm) or 62 1/2" (1588mm) wide. Height is 36" (915mm) overall including stand, legs and casters.

One (1) year limited parts and labor warranty included.

### Gas Charbroilers

#### Built-In Models

CBBQ-30S-BI  
CBBQ-60S-BI

#### Base Models

CBBQ-30S  
CBBQ-60S

#### Packages

CBBQ-30S-P  
CBBQ-60S-P

#### Complete Packages

CBBQ-30S-CP  
CBBQ-60S-CP

### Standard Features

- 20, 000 BTUH steel burners every 7" (178mm) with independently controlled, adjustable valves for each burner
- Up to 160,000 BTUH per broiler in natural or LP Gas
- Crossover pilot tube system
- Stainless steel radiant heat deflectors
- Heavy-duty nickel-chrome plated top grates
- Stainless steel, front-mounted work deck 8" deep (203mm)
- Stainless steel valve panel
- Stainless steel outer construction
- Stainless steel water/grease pans
- Pressure regulator(s)
- Stainless steel stand
- Set of 4 heavy duty stainless steel legs with casters two with locks
- Limited one year part & labor warranty


### Options & Accessories

- Smoke & Roast roll-top hoods in 30" (762mm) or 60" (1524mm) sizes
- Wind & Splash guards in 30" (762mm)
- Steamer System 15" wide (381mm) (pans not included)
- Side mounted work deck
- Rear mounted work deck
- Stainless steel undershelves
- Richlite cutting boards in 30" (762mm) or 60" (1524mm) sizes for front-mounted work decks
- 11" wide (279mm) removable griddle plate
- 30" wide (762mm) In-Line griddle plate
- All weather covers
- Propane tank caddies
- 40 lb. LP tanks
- Built in versions

### Certifications



## The Ultimate Outdoor Char-Broiler

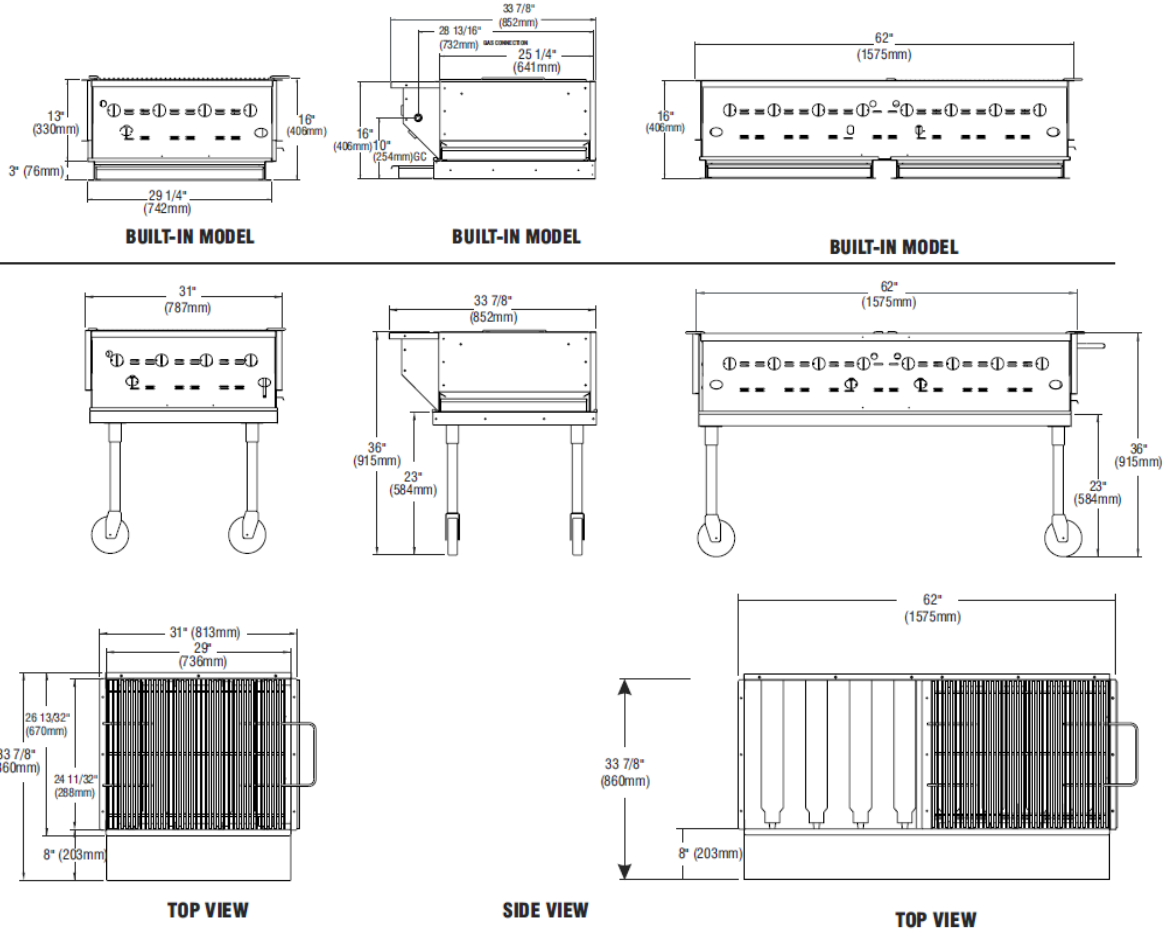

All Dimensions Nominal

SHIPPING INFORMATION								
Model	Shipping Weights		Carton Dimensions			Crate Size		Cubic Meter
	Lbs.	Kilos	Width inches / (mm)	Depth inches / (mm)	Height inches / (mm)	Cubic Feet		
CBBQ-30	300	136	33/838	30/762	19/483	10.8	.30	
CBBQ-60	500	227	63/1600	30/762	19/483	20.8	.58	

GAS SUPPLY					
Model	Gas Type	BTUH	KW	CONNECTION	# of Connections
CBBQ-30	LP	80,000	23.44	3/8"	1
CBBQ-30	Natural	80,000	23.44	3/4"	1
CBBQ-60	LP	160,000	46.88	3/8"	2
CBBQ-60	Natural	160,000	46.88	3/4"	1

SPECIFICATIONS							
Model	Broiling Area				Overall Dimensions		
	In.	(mm)	# Top Grates	# of Burners	Width inches / (mm)	Depth* inches / (mm)	Height* inches / (mm)
CBBQ-30	29 x 24	736 x 610	1	4	31 / 813	33 7/8" / 860	36 / 915
CBBQ-60	58 x 24	1473 x 610	2	8	62 / 1575	33 7/8" / 860	36 / 915

Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification.