





## VANTAGE SERIES RANGES

### SERIES: BPV-24"-36"



Bakers Pride® 24" ranges feature four burners and one 30,000 BTUH oven, while the 36" series offers six burners and a 38,000 BTUH oven. Cleaning is easy thanks to the lift-off burner heads and removable oven door. The cast-iron section grates are designed to allow pots to slide from section to section. In the oven, a unique burner baffle distributes heat evenly throughout the oven, which is also porcelainized on two contact surfaces. Available for use with natural gas or liquid propane.

#### VANTAGE STOVE TOP CONFIGURATIONS



#### FEATURES AT A GLANCE

- 28,000 BTUH burners
- Lift-off burner heads
- Natural gas or LP gas
- 24" (610 mm) range: four burners and one 20" (508 mm) wide, 30,000 BTUH oven
- 36" (914 mm) range: six burners and one 36" wide, 38,000 BTUH oven
- Stainless steel front, landing ledge, and back guard
- Aluminized sides
- Oven is porcelainized on bottom and door liner
- 12" (305 mm) sq. cast-iron section grates
- 5" (127 mm) landing ledge
- 10" (254 mm) back shelf
- Oven has 150–500°F (65–260°C) holding range
- 6" (152 mm) adjustable legs
- Unique burner baffle design
- Removeable oven door
- Standard pans fit front to back in oven
- One oven rack with two rack guides
- One-year limited warranty

#### OPTIONS & ACCESSORIES


- Additional oven racks
- Quick disconnect and flexible gas hose
- Casters (set of four)
- Gas conversion kits



# VANTAGE SERIES RANGES

## SERIES: BPV-24"-36"

### EQUIPMENT DIMENSIONS

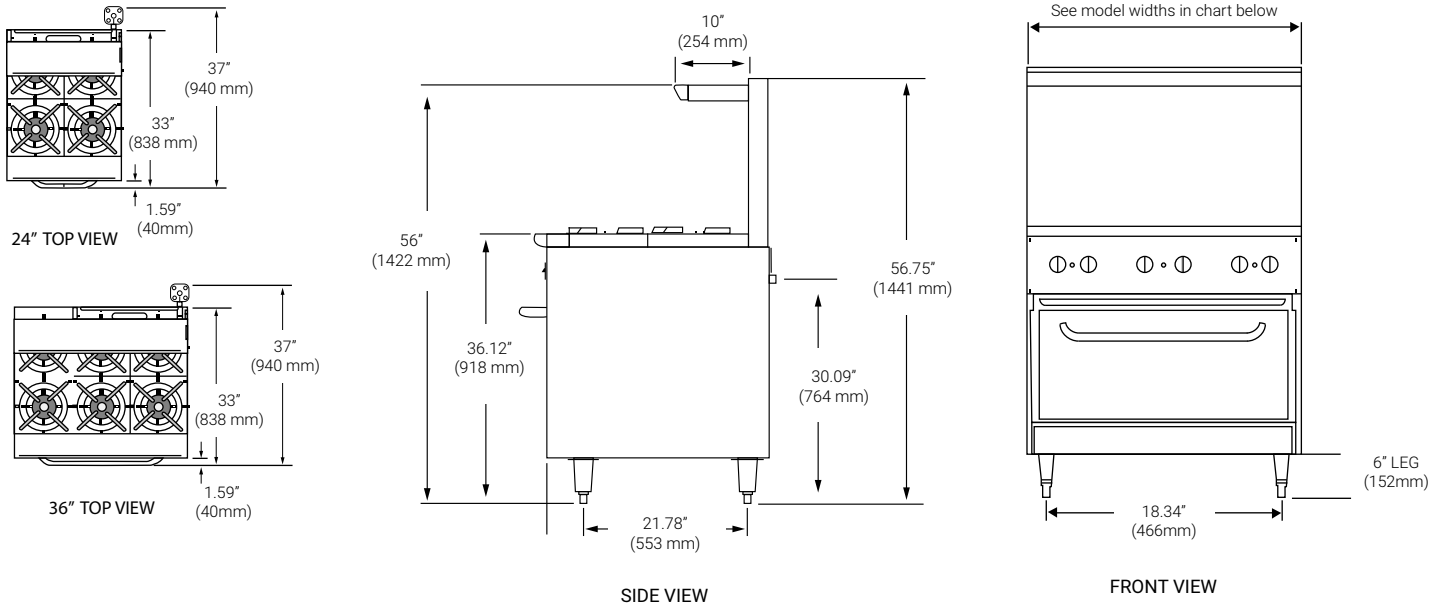

### MECHANICAL SPECIFICATIONS

Model #	BTU	# 12" sq. Grates	Griddle Width	Oven Width	Charbroiler	Overall Dim (W x H x D)	Carton Dim (W x H x D)	Cubic Feet	Cubic Meter	Ship Wt.
24-BPV-4B-S20	142,000	4	n/a	20" (508)	n/a	24" x 56.75" x 37" (610 x 1441 x 940)				480 (218kg)
36-BPV-6B-S30	206,000	6	n/a	30" (508)	n/a	36" x 56.75" x 37" (914 x 1441 x 940)				600 (272kg)

\*Height includes 6" legs. Depth includes 4" gas regulator.

### REQUIRED CLEARANCES

	Non-combustible
Left	14" (356 mm)
Right	14" (356 mm)
Back	4" (102 mm)

### OVEN INTERIOR DIMENSIONS

20" Oven	30" Oven
20.5" x 15" x 26.5" (521 x 381 x 673)	30" x 15" x 26.5" (762 x 381 x 673)

### GAS CONNECTIONS

Manifold pressure is 5.0" W.C. or natural gas o 10.0" for propane gas. Manifold size is 3/4" NPT.  
 3/4" pressure regulator supplied with equipment to be installed at time of connection.  
 Must specify type of gas and elevation if over 2000 ft. when ordering.



Freight Class: 110  
 FOB: Allen, 75013

Bakers Pride reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

9.16.2019

