



## VANTAGE SERIES RANGES

### SERIES: BPV 60" 10-BURNER



Bakers Pride® BVP series ranges feature two 26" wide ovens, plus ten 12" x 12" burners with lift-off heads for greater performance and easy cleaning. The grates are made of heavy-duty cast iron for long life and are designed to allow pots to slide from section to section.

The unique burner baffle distributes heat flow evenly throughout the ovens, which are porcelainized on two contact surfaces. Ovens are designed to accommodate standard pans and feature adjustable thermostats from 150–500°F. The 5" front landing edge provides a functional work area, and the oven door is removable for easy cleaning. This series is available for use with natural gas or liquid propane.


#### FEATURES AT A GLANCE

- Two 26.5" (673 mm) wide, 38,000 BTUH ovens
- 28,000 BTUH burners
- Lift-off burner heads
- Stainless steel front, landing ledge, and back guard
- Aluminized sides
- Ovens are porcelainized on bottom and door liner
- 12" (305 mm) sq. cast-iron grates
- 5" (127 mm) stainless steel landing ledge
- 10" (254 mm) back shelf
- 150–500°F (65–260°C) oven temperature range
- 6" (152 mm) adjustable legs
- Removable oven doors
- Ovens accommodate standard pans front to back
- Two rack guides with one oven rack per oven
- One-year limited warranty

#### OPTIONS & ACCESSORIES

- Additional oven racks
- Quick disconnect and flexible gas hose
- Casters (set of six)
- Gas conversion kit

#### VANTAGE STOVETOP CONFIGURATION

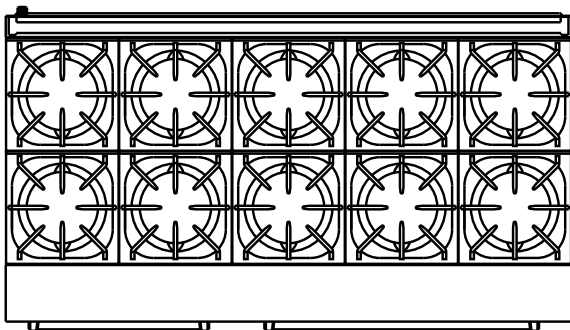




# VANTAGE SERIES RANGES

## SERIES: BPV 60" 10 BURNER

### EQUIPMENT DIMENSIONS

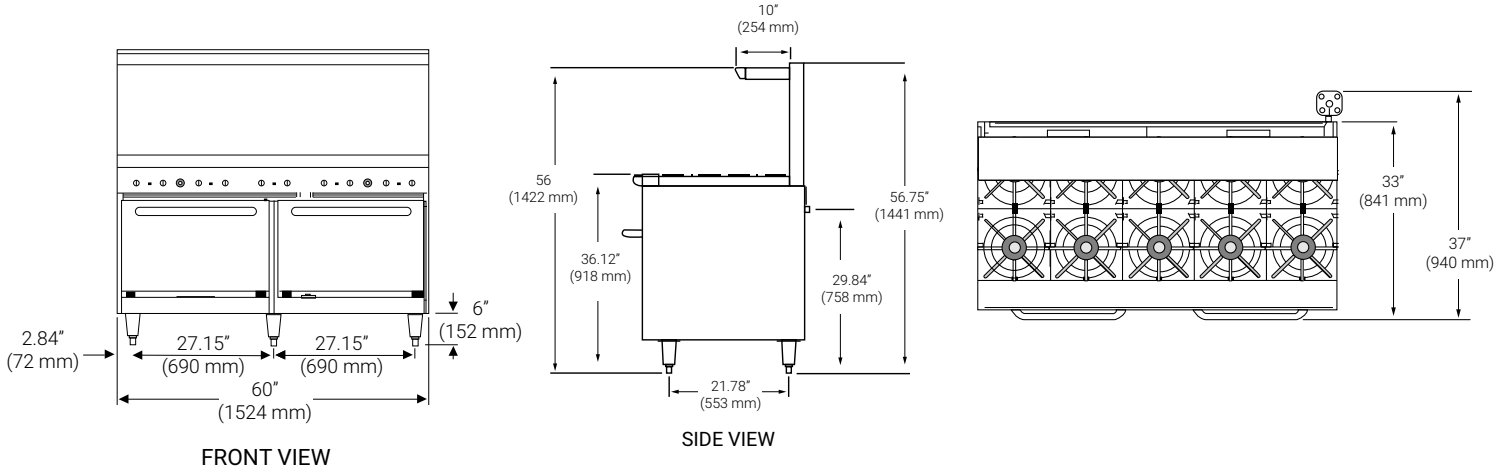

### MECHANICAL SPECIFICATIONS

Model #	BTU	# 12" sq. Grates	Oven/s Width	Overall Dim (W x H x D)	Carton Dim (W x H x D)	Cubic Feet	Cubic Meter	Ship Wt.
60-BPV-10B-S26	356,000	10	26.5" (673)	60" x 56.75" x 37" (1524 x 1441 x 940)				995 (451kg)

\*Height includes 6" legs. Depth includes 4" gas regulator.

### REQUIRED CLEARANCES

	Non-combustible
Left	14" (356 mm)
Right	14" (356 mm)
Back	4" (102 mm)

### OVEN INTERIOR DIMENSIONS

26.5" x 15" x 26.5"  
(673 x 381 x 673)

### GAS CONNECTIONS

Manifold pressure is 5.0" W.C. or natural gas or 10.0" for propane gas. Manifold size is 3/4" NPT.

3/4" pressure regulator supplied with equipment to be installed at time of connection.

Must specify type of gas and elevation if over 2000 ft. when ordering.



Freight Class: 110  
 FOB: Allen, 75013

Bakers Pride reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

